

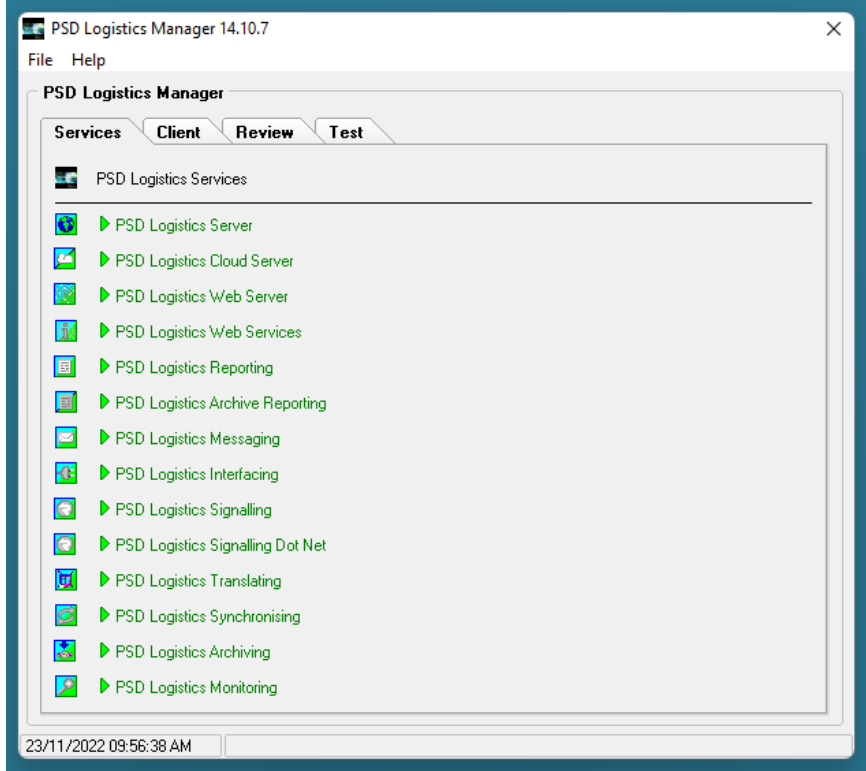
How To Configure PSD Logistics Web Server

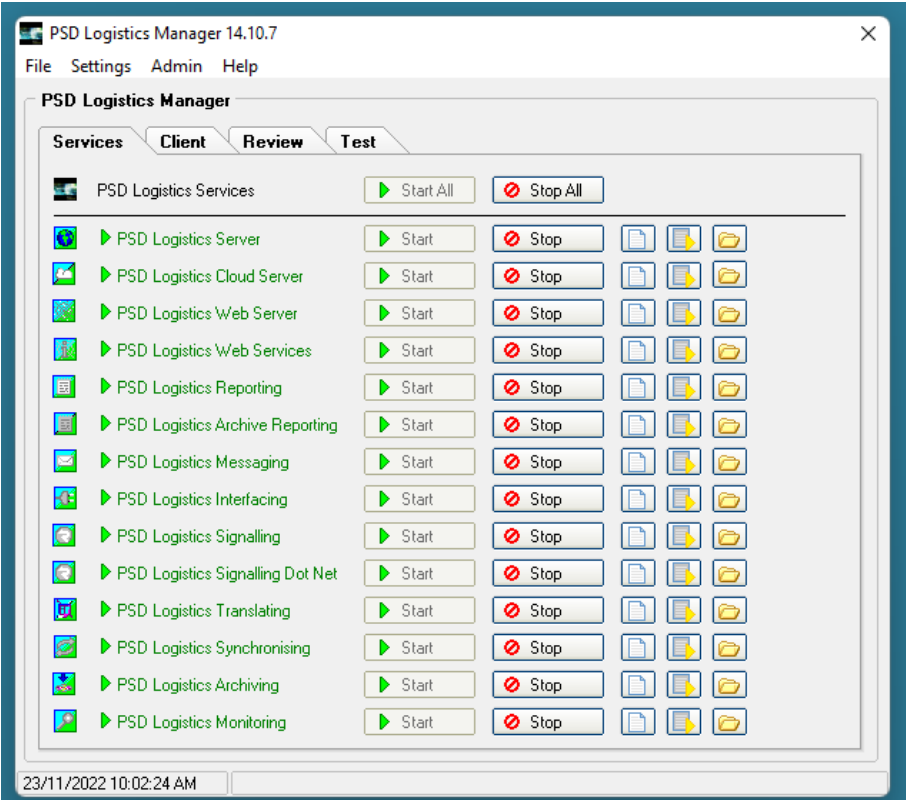
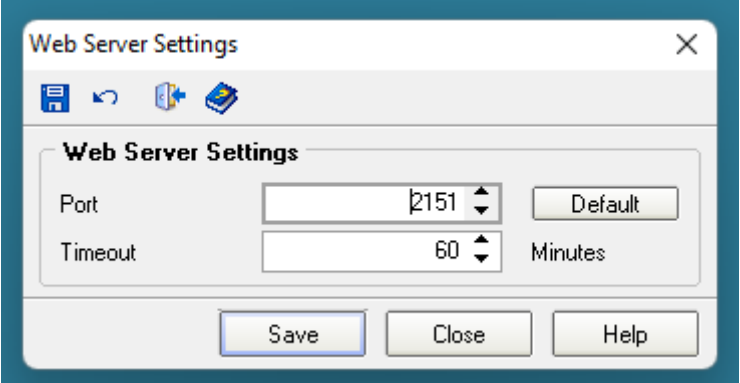
Last Updated 13/01/2023

The PSD Logistics Web Server can be via the URL : <http://ServerName:Port>

The server name is the hostname of the PSD Logistics Server. The port number can be set by following these steps.

Solution

Step	Action
1	<p>Log into MS Windows on the server hosting the PSD Logistics Server services. Run PSDLogisticsManager.exe using "Run As Administrator". The default folder for this application is C:\Program Files (x86)\PSDLogistics\Manager\.</p>  <p>The screenshot shows the PSD Logistics Manager 14.10.7 application window. The window title is "PSD Logistics Manager 14.10.7" and it has a menu bar with "File" and "Help". Below the menu bar, there are four tabs: "Services", "Client", "Review", and "Test". The "Services" tab is selected, and it displays a list of services under the heading "PSD Logistics Services". The services listed are: PSD Logistics Server, PSD Logistics Cloud Server, PSD Logistics Web Server, PSD Logistics Web Services, PSD Logistics Reporting, PSD Logistics Archive Reporting, PSD Logistics Messaging, PSD Logistics Interfacing, PSD Logistics Signalling, PSD Logistics Signalling Dot Net, PSD Logistics Translating, PSD Logistics Synchronising, PSD Logistics Archiving, and PSD Logistics Monitoring. Each service has a small icon to its left. At the bottom of the window, there is a status bar showing the date and time: "23/11/2022 09:56:38 AM".</p>

<p>2</p>	<p>Select "File" -> "Login" and log into the PSD Logistics Manager using the admin account. The default password is "admin". A number of menu items and features will be displayed.</p>  <p>The screenshot shows the PSD Logistics Manager 14.10.7 application window. The 'Services' tab is active, displaying a list of services with 'Start' and 'Stop' buttons for each. The services listed include PSD Logistics Server, Cloud Server, Web Server, Web Services, Reporting, Archive Reporting, Messaging, Interfacing, Signalling, Signalling Dot Net, Translating, Synchronising, Archiving, and Monitoring. The window title bar shows the date and time as 23/11/2022 10:02:24 AM.</p>
<p>3</p>	<p>Select "Settings" -> "Web Server". This will display the web server port information.</p>  <p>The screenshot shows the 'Web Server Settings' dialog box. It contains two input fields: 'Port' with a value of 2151 and a 'Default' button, and 'Timeout' with a value of 60 and the unit 'Minutes'. At the bottom, there are 'Save', 'Close', and 'Help' buttons.</p>
<p>4</p>	<p>Enter the port number as required. The default port number is 2151.</p>
<p>5</p>	<p>Select "Save" and "Close".</p>